



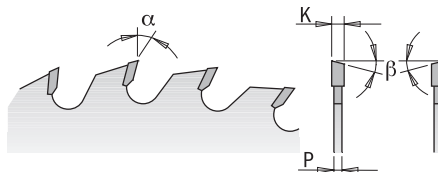


285-291-294-295

- ANVENDELSE:** Til flækning og afkortning i bedste kvalitet.
MASKINER: Bordsave, specialsave og transportable save.
MATERIALER: Blødt og hårdt træ. Træbaserede plader.



| D mm | B mm | PINHULLER  | Z | K mm | P mm | α | β | VARENUMMER |
|---------|---------|--|----|---------|---------|-----------|---------|-------------|
| 200 | 30 | 2/10/60 + 2/7/42 | 36 | 3,2 | 2,2 | 15° | 10° ATB | 285.036.08M |
| 200 | 30 | 2/10/60 + 2/7/42 | 48 | 3,2 | 2,2 | 15° | 15° ATB | 285.048.08M |
| 250* | 20 | COMBI3 | 40 | 3,2 | 2,2 | 15° | 10° ATB | 285.040.10H |
| 250 | 30 | COMBI3 | 40 | 3,2 | 2,2 | 15° | 10° ATB | 285.040.10M |
| 250 | 30 | COMBI3 | 48 | 3,2 | 2,2 | 15° | 10° ATB | 285.048.10M |
| 250 | 30 | COMBI3 | 60 | 3,2 | 2,2 | 10° | 15° ATB | 285.060.10M |
| 250 | 35 | | 40 | 3,2 | 2,2 | 15° | 10° ATB | 285.040.10R |
| 250 | 35 | | 60 | 3,2 | 2,2 | 10° | 15° ATB | 285.060.10R |
| 254 | 30 | COMBI3 | 48 | 2,4 | 1,8 | - 5° Neg. | 15° ATB | 294.048.10M |
| 254 | 30 | COMBI3 | 60 | 2,4 | 1,8 | - 5° Neg. | 15° ATB | 294.060.10M |
| 260 | 30 | 2/10/60 + 2/7/42 | 48 | 2,8 | 1,8 | 15° | 10° ATB | 285.048.11M |
| 260 | 30 | 2/10/60 + 2/7/42 | 60 | 2,8 | 1,8 | 10° | 15° ATB | 285.060.11M |
| 260 | 30 | COMBI3 | 60 | 2,5 | 1,8 | - 5° Neg. | 15° ATB | 294.060.11M |
| 270* | 30 | 2/7/42 | 42 | 2,8 | 1,8 | 15° | 15° ATB | 291.270.42M |
| 275 | 20 | | 42 | 3,2 | 2,2 | 15° | 10° ATB | 285.042.11H |
| 280* | 30 | 2/10/60 + 2/7/42 | 64 | 2,8 | 1,8 | 10° | 15° ATB | 295.064.11M |
| 300* | 20 | COMBI3 | 48 | 3,2 | 2,2 | 15° | 10° ATB | 285.048.12H |
| 300 | 30 | COMBI3 | 36 | 3,2 | 2,2 | 15° | 10° ATB | 285.036.12M |
| 300 | 30 | COMBI3 | 48 | 3,2 | 2,2 | 15° | 10° ATB | 285.048.12M |
| 300 | 30 | COMBI3 | 60 | 3,2 | 2,2 | 15° | 10° ATB | 285.060.12M |
| 300 | 30 | COMBI3 | 72 | 3,2 | 2,2 | 10° | 15° ATB | 285.072.12M |
| 300 | 35 | | 48 | 3,2 | 2,2 | 15° | 10° ATB | 285.048.12R |
| 300 | 35 | | 72 | 3,2 | 2,2 | 10° | 15° ATB | 285.072.12R |
| 305* | 30 | 2/10/60 + 2/7/42 | 54 | 2,8 | 1,8 | -5° Neg. | 15° ATB | 294.054.22M |
| 315* | 30 | COMBI3 | 54 | 3,2 | 2,2 | 15° | 10° ATB | 294.054.12M |
| 350 | 30 | COMBI3 | 54 | 3,5 | 2,5 | 15° | 10° ATB | 285.054.14M |
| 350 | 30 | COMBI3 | 72 | 3,5 | 2,5 | 15° | 10° ATB | 285.072.14M |
| 350 | 30 | COMBI3 | 84 | 3,5 | 2,5 | 10° | 15° ATB | 285.084.14M |
| 350 | 35 | | 54 | 3,5 | 2,5 | 15° | 10° ATB | 285.054.14R |
| 350 | 35 | | 84 | 3,5 | 2,5 | 10° | 15° ATB | 285.084.14R |
| 400 | 30 | COMBI3 | 48 | 3,5 | 2,5 | 20° | 10° ATB | 285.048.16M |
| 400 | 30 | COMBI3 | 60 | 3,5 | 2,5 | 10° | 15° ATB | 285.060.16M |
| 450 | 30 | 2/10/60 | 54 | 3,8 | 2,8 | 15° | 15° ATB | 285.054.18M |
| 450 | 30 | 2/10/60 | 66 | 3,8 | 2,8 | 10° | 15° ATB | 285.066.18M |
| 500 | 30 | 2/10/60 | 60 | 3,8 | 2,8 | 15° | 15° ATB | 285.060.20M |
| 500 | 30 | 2/10/60 | 72 | 3,8 | 2,8 | 10° | 15° ATB | 285.072.20M |
| 550 | 30 | 2/10/60 | 60 | 4,2 | 3,2 | 10° | 15° ATB | 285.060.22M |
| 550 | 30 | 2/10/60 | 96 | 4,2 | 3,2 | 10° | 15° ATB | 285.096.22M |
| 600 | 30 | 2/10/60 | 66 | 4,2 | 3,2 | 10° | 15° ATB | 285.066.24M |
| 700 | 30 | 2/10/60 | 72 | 4,4 | 3,2 | 10° | 15° ATB | 285.072.28M |

* Ikke støjsvag